



Insulated Structures

Efficiency At Work

CURVATURE – HOT TO GO



Standard Specifications

- Stainless Steel Cut Outs & Inserts
- Cladding as per Pricing Structure
- Rear Sliders
- Powder Coated Cladding
- Electronic Controllers

Optional Specifications

- 20mm Glass Patch Ends
- Solid Patch Ends
- Chip Dump Inserts
- Heated Glass Inserts
- Wooden Front Baskets
- Cladding Options: Refer to Cladding Details Document . (Available on Request)

Leaders in world class innovation for bespoke end to end energy efficient refrigeration solutions






Insulated Structures
Efficiency At Work



Insulated Structures

Efficiency At Work

CURVATURE – HOT TO GO

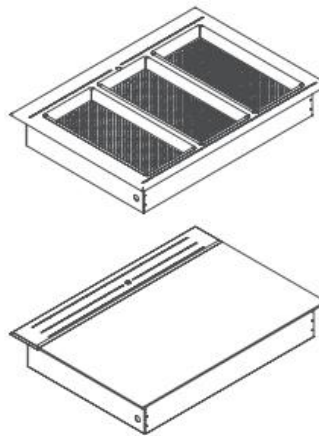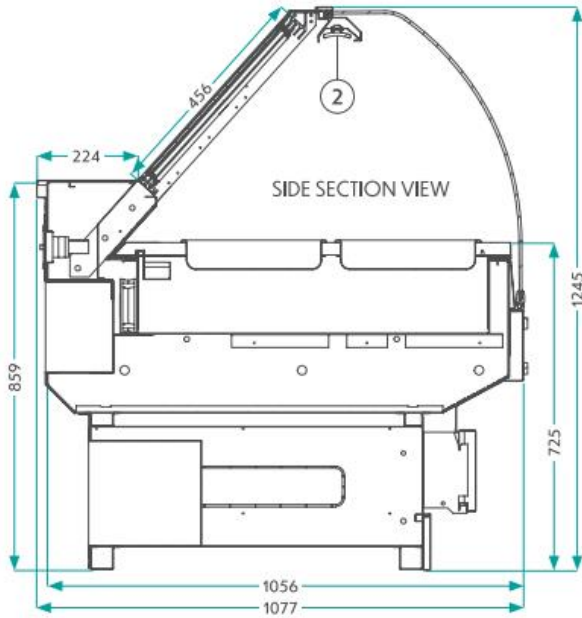


Chip Dump Insert

- 3 x Insert with Oil Strainers Per 4'
- 5 x Insert with Oil Strainers Per 6'
- Water Tray for Humidification

Optional Humidified Insert

- Heating Surface 680 x 1200 In 4'
- Heating Surface 680 x 1800 In 6'
- Water Tray for Humidification

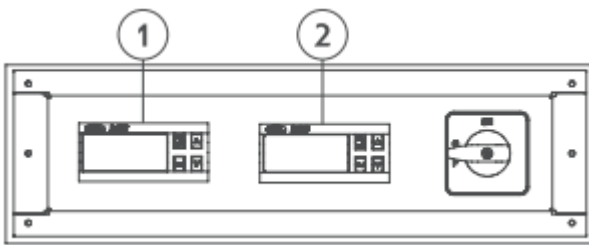

Controller Requirements		
Number	Control Temp Settings	Shelves
1	105°C	Bin Dry Elements
2	75°C	Top Ceramic Infrared heaters & shelf

Physical Properties				
Size	Length (m)	TDA (m ²)	E1	E2
4ft	1.218	0.63	-	100mm
6ft	1.828	0.94	-	160mm
8ft	2.438	1.24	-	100mm
12ft	3.658	1.86	-	100mm

Electrical Specifications							
Fans	Heaters	Heaters	Heaters	Lighting	Lighting	Current	Current
Circulation Fans	Sticky Heat Shelf	Bin-Dry Elements	Top Ceramics	Case (LED)	Shelf (LED)	Single Phase	Three Phase
1x14W	1x265W	3x500W	3x150W	1x16W	1x16W	12A	-
1x14W	1x418W	4x500W	4x150W	1x25W	1x25W	16A	-
2x14W	2x265W	6x500W	4x150W	2x16W	2x16W	20A	8.5A
3x14W	3x265W	9x500W	6x150W	3x16W	3x16W	32A	8.5A

Leaders in world class innovation for bespoke end to end energy efficient refrigeration solutions

