



# Insulated Structures

*Efficiency At Work*

## GLASS DOOR FREEZER



Standard Specifications	
• 5 x LED Lit Stainless Steel Shelves	• Standard Coil
• Front Fences	• Aluminum Ticket Rails
• Front Glass	• Electronic Display
• Shaded Pole Fans	• Canopy LED's
• Valves (Brass Thermostatic)	
• Ceiling LED for Top Shelf	

Optional Specifications
• Stainless Steel Wire Shelves
• Stainless Steel Shelves

*Leaders in world class innovation for bespoke end to end energy efficient refrigeration solutions*




**Insulated Structures**  
*Efficiency At Work*



# Insulated Structures

*Efficiency At Work*

## GLASS DOOR FREEZER

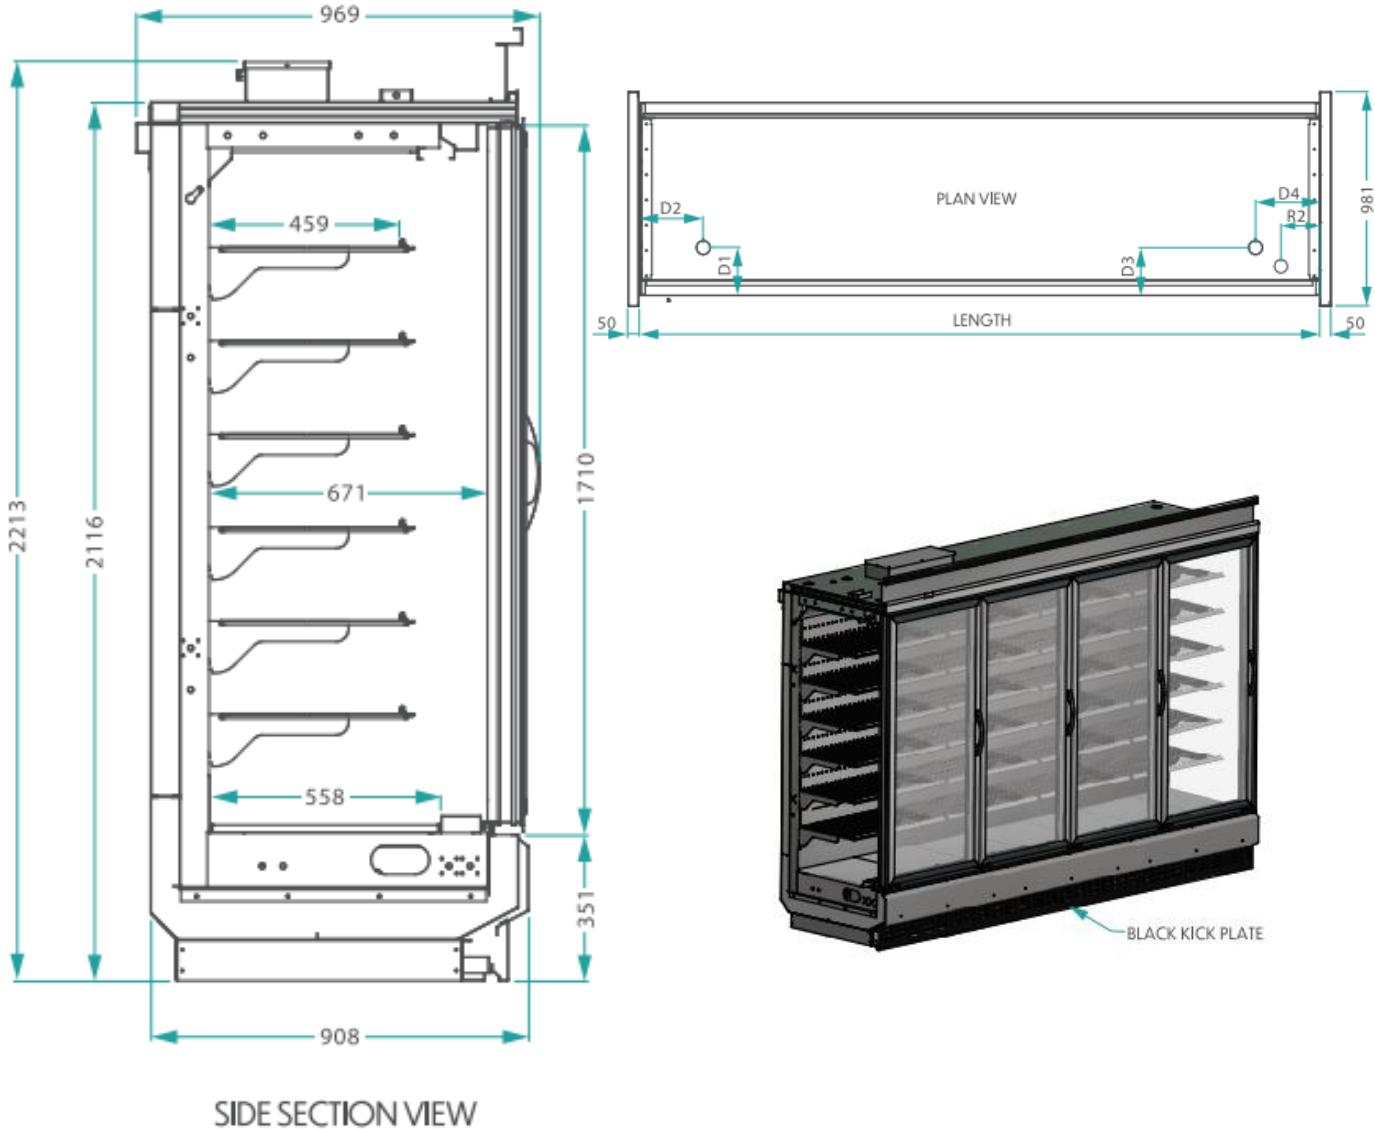

Physical Properties		Drain, Electrical and Refrigeration Points									
Size	TDA (m <sup>2</sup> )	Size	Length (m)	D1	D2	D3	D4	R1-Btm Exit	R2-Btm Exit	R3-Btm Exit	R4-Btm Exit
2 Door	1.87	2 Door	1.579	220mm	300mm	220mm	300mm	150mm	180mm	100mm	120mm
3 Door	2.81	3 Door	2.364	220mm	300mm	220mm	300mm	150mm	180mm	100mm	120mm
4 Door	3.75	4 Door	3.144	220mm	300mm	220mm	300mm	150mm	180mm	100mm	120mm
5 Door	4.68	5 Door	3.940	220mm	300mm	220mm	300mm	150mm	180mm	100mm	120mm

Refrigeration Requirements			Electrical Specifications					
Case	Refrigeration	Evaporation Temp	Evaporator Fans (Fan Blade + Motor)		Heaters Defrost	Heaters Frame and Door	Heater Drain	Lighting Frame (LED)
Freezer	645W/Door or 260W/ft	-32°C	2xØ200-28°/36W (SPM) or 24W (ECM)		2600W	639W	2 x 10W	50W
Freezer I-Cream	645W/Door or 26W/ft	-37°C	3xØ200-28°/36W (SPM) or 24W (ECM)		4000W	974W	2 x 10W	65W
Chiller	285W/Door or 115W/ft	-5°C	4xØ200-31°/36W (SPM) or 24W (ECM)		5200W	1258W	2 x 10W	82W
			4xØ200-31°/36W (SPM) or 24W (ECM)		5200W	2644W	2 x 10W	127W

*Leaders in world class innovation for bespoke end to end energy efficient refrigeration solutions*

