



Insulated Structures

Efficiency At Work

B-HOT UPRIGHT SELF-CONTAINED Food Merchandiser



Standard Specifications

• Black Interior	• Undershelf LED Lights: 4000k 90CRI
• Black Bottom and Top Cladding	• Bottom Pan with Stainless Steel Front Fence
• 20mm Patch Ends	• Rollers for easy mobility
• Removable Front Riser Glass	• 40mm Insulation to reduce Heat Loss
• Double Flush Linear Bars	• Complete Shelf is Heated (No Hotspots)
• Bullnose Shelves with Aluminum Label Holder	

*Leaders in world class innovation for bespoke
end to end energy efficient refrigeration
solutions*




Insulated
Structures
Efficiency At Work




Insulated Structures

Efficiency At Work

B-HOT UPRIGHT SELF-CONTAINED Food Merchandiser

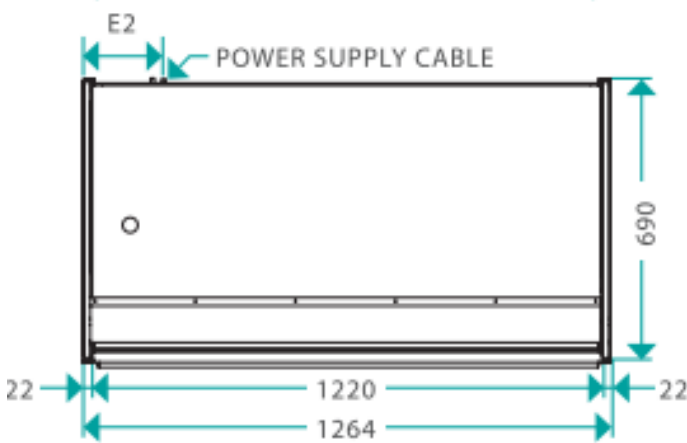

PLAN VIEW

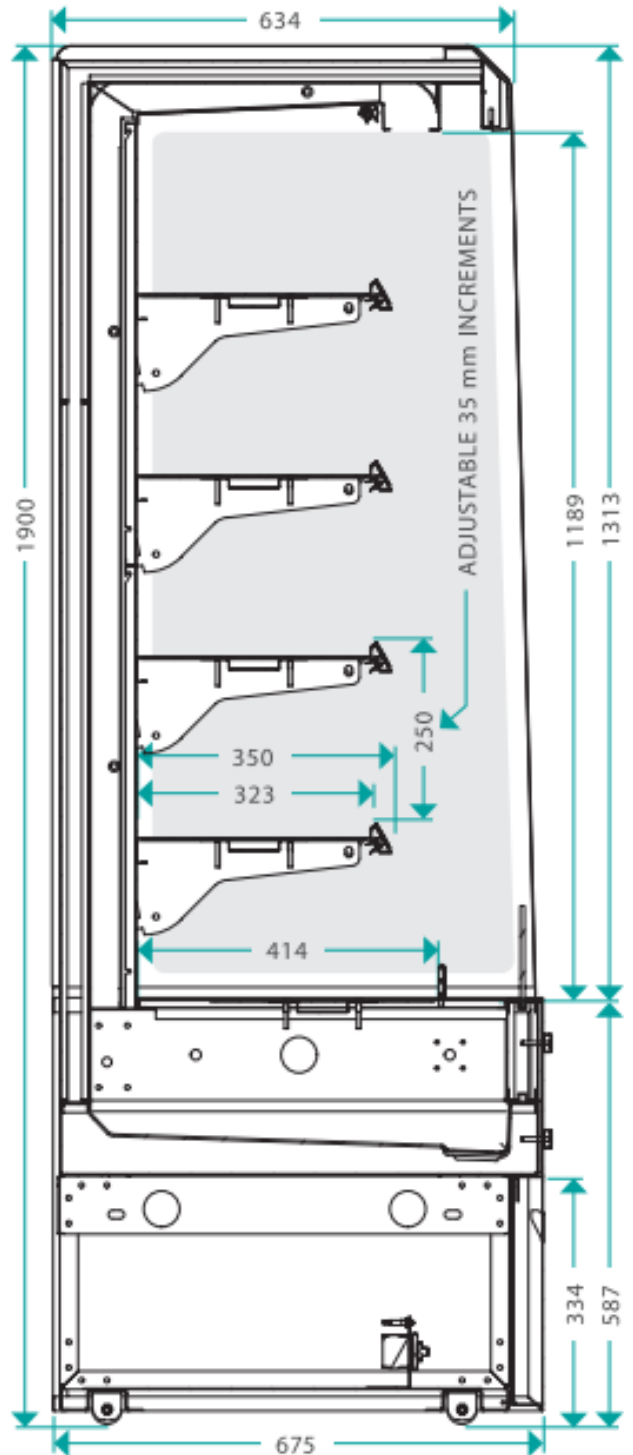

Physical Properties				
Size	Length (m)	TDA (m ²)	E1	E2
4ft	1.264	1.40	-	167mm

Electrical Specifications				
Heaters	Lighting	Lighting	Power	Power
Pad Heater	Ceiling LED	Shelf LED	Total Power @ 220V	Single Phase
5x435W	1x12W	4x12W	2235W	12A@220V

Control Requirements	
Control Temperature	Shelves
65°C	Shelves
65°C	Bottom Pan

Leaders in world class innovation for bespoke end to end energy efficient refrigeration solutions



Insulated Structures
Efficiency At Work