



Insulated Structures

Efficiency At Work

B-COLD UPRIGHT SELF-CONTAINED Merchandiser



Standard Specifications

- | | |
|---------------------------------|--|
| • Black Interior & Exterior | • Bull-Nose Shelves with Aluminum Label Holder |
| • 20mm Glass Patch Ends | • Under Shelf LED Lights: 4000K 90CRI |
| • Double Flush Rectangular Bars | • Rollers for easy Mobility |
| • Manual Night Blinds | |

Leaders in world class innovation for bespoke end to end energy efficient refrigeration solutions







Insulated Structures

Efficiency At Work

B-COLD UPRIGHT SELF-CONTAINED Merchandiser

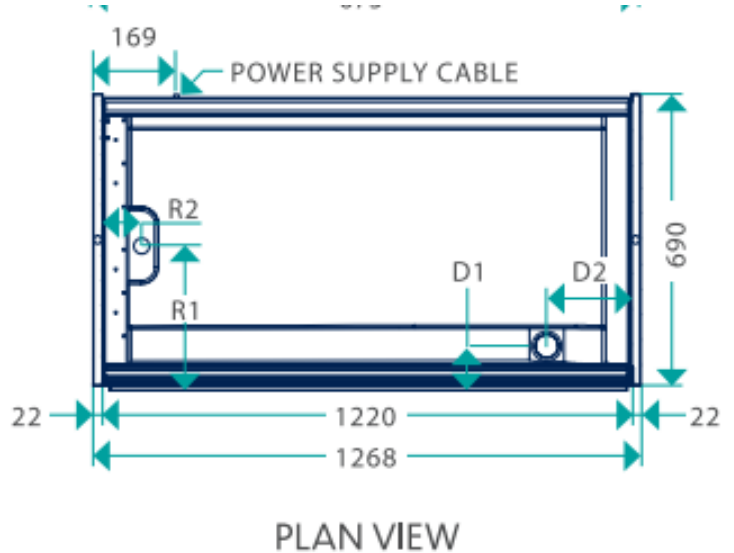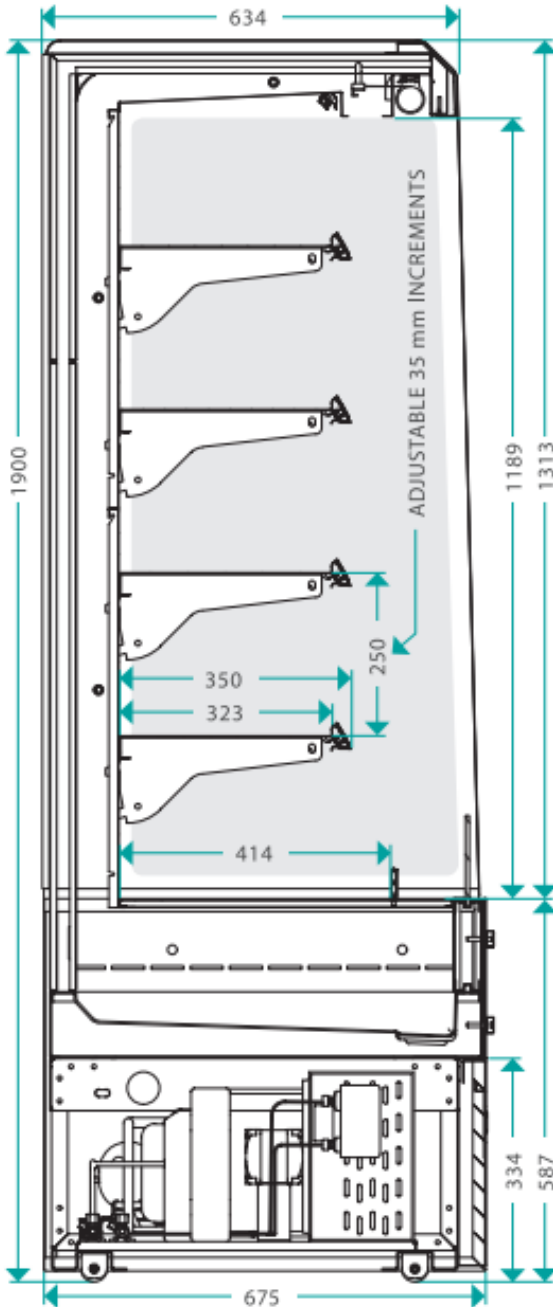

Physical Properties			Drain and Refrigeration points				Refrigeration Requirements			
Size	Length (m)	TDA (m ²)	D1	D2	R1	R2	Gas Type	Refrigeration	Evaporation Temp	Defrost Cycle
4ft	1.220	1.40	80mm	150mm	90mm	330mm	R404A	480W/ft	-8 °C	Off Cycle

Electrical Specifications						
Evaporator Fans	Circulation Fans	Condensing Units	Heaters (Boil-Off Pan)	Lighting Ceiling (LED)	Lighting Shelf (LED)	Total Power
1xw2e142 EBMPAPST – 27W	1x12W	HQHD-23KAR-1150W	1x1500W	1x12W	4x12W/Shelf	Single Phase 15A @220V

Leaders in world class innovation for bespoke end to end energy efficient refrigeration solutions