


Efficiency At Work

POLYURETHANE PANELS

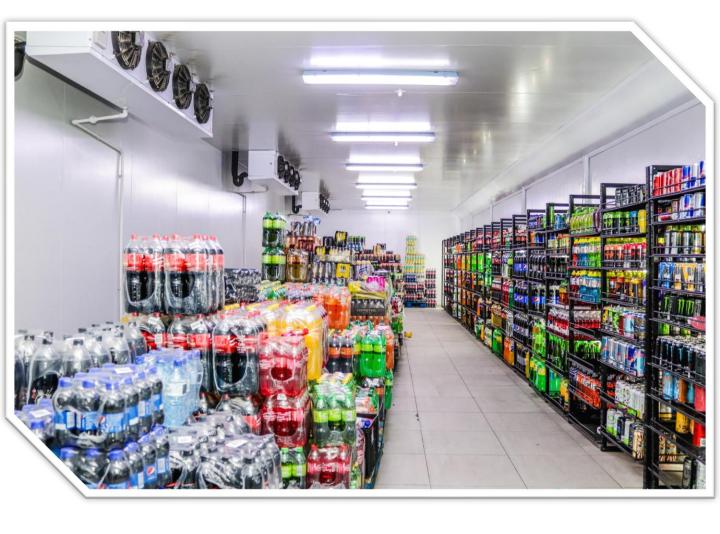

Panel Specifications

- Standard Panels: Outer skin of brilliant white Chromodek, available in black
- Superior Polyurethane insulation injected for superior insulation and adhesion.
- High-impact PVC interlock profiles on all edges provides totally sealed insulation and a perfect vapour barrier
- Easily erected and dismantled
- Optional skin finish in Stainless Steel Grades AISI 304 and AIS 403

Floors - Fabricated and Concrete

Fabricated Floors

The inside floor finish is 2mm Aluminium Treat Plate or 0.8mm Galvanised plate glued to a marine nly base.

Concrete Floors

Concrete floors are used for flush entry – no step up and in permanent structures. Usually a recess
of 150 – 170mm is used to accommodate the foam slab insulation and the concrete screed






Efficiency At Work

AUTO GLASS DOORS



Auto Doors

- Auto Glass Door Customer display areas
- Glass Thermopanes made to order sizes







Efficiency At Work

MEAT RAILS



- Hot Dipped or Electro Plated Galvanised system
- Support structure integrated into insulated panels
- Optional free standing continuous galvanized system with switch gear
- Optional imported continuous aluminium system





Efficiency At Work

BUMPER RAILS & GOAL POSTS



Bumper Rails

- Galvanised or Stainless Steel pipe bumpers to protect cases, panels and
- Heavy duty galvanized steel angles for back of house areas
- Custom made Goal Posts to protect loading door frames







Efficiency At Work

ALUMINIUM CHEQUER PLATE



- Installed as an option to protect panels from scratches and light impact damage
- 1.6mm thick
- Standard 1.25m AFFL





Efficiency At Work

STRIP CURTAIN



- Ball edge to reduce tearing
- Available in clear or translucent colours: Red, Black or Blue
- 200mm wide strips for light duty pedestrians
- 300mm wide strips for medium duty pallet jacks
- 400mm wide strips for heavy duty fork lifts

